


# Round Series

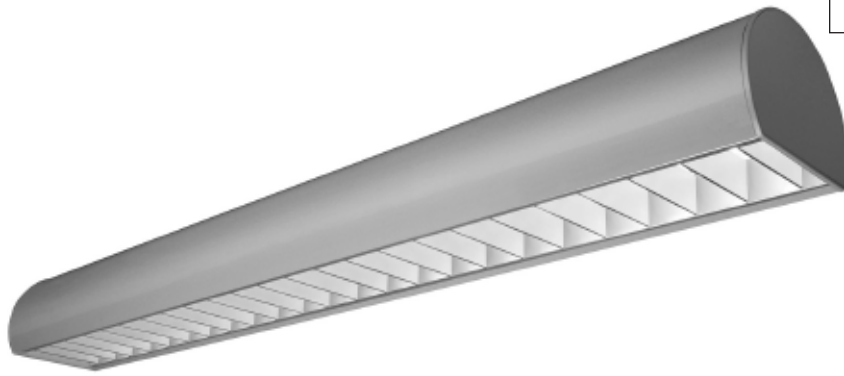

Catalog Number	Type
Project Name	

## AR622 • AR623

6<sup>3</sup>/<sub>4</sub>" Round Parabolic Direct  
(T8, T5 or T5HO Lamps)

### S P E C I F I C A T I O N S

#### Housing

One-piece .125" thick extruded aluminum. Die-cast aluminum end plates are secured with no visible fasteners. Standard lengths are 4', 8' and 12'. Provisions may be made for continuous rows of any length.

#### Finish

Standard and premium finishes are baked powder coat electrostatically applied (2.0 mil minimum thickness) to assure aesthetics and durability. Standard finish for stems and canopies is white.

#### Direct Optical Control

■ (PB) 1 1/2" deep semi-specular aluminum parabolic cross baffle with blades on 3" centers

#### Reflectors

Die-formed from .020" thick specular aluminum.

#### Ballast

Standard ballasts for T5 and T5HO lamps are UL/CUL listed, Class P, HPF, electronic, universal 120/277volt, programmed rapid start with <10% THD.

Standard ballasts for T8 lamps are UL/CUL listed, Class P, HPF, electronic, universal 120/277volt, instant start with <10% THD.

#### Circuitry


All fixtures are factory pre-wired for a single circuit. Provision for multiple switching/circuiting is optional.

#### Controls


Contact factory for control by Occupancy Sensors, Photo Controls and Daylight Harvesting.

#### Certification

All fixtures are UL/CUL listed for use in 'Dry Applications'. 'Damp Location' is optional.



AR622



AR623

\*Cast Connectors are not available for the AR622 and AR623. Consult factory for available connector options.

<p><b>Standard Lengths:</b> 4', 8' and 12'</p>	<p><b>Mounting</b></p> <p>CN = Cable (Non-Tbar) Fully Adjustable (36" Standard) P = Rigid Stem (Up to 48' Standard) K = Swivel Stem (Up to 48' Standard) J = Ceiling W = Wall</p>	<p><b>Series</b> AR622 AR623</p>
--	---	--

## AR622-12-CN-PB-F01M-V-T8-[]

<p><b>Optical Control</b> PB Parabolic Cross Baffle</p>	<p><b>Standard Finishes</b> F01M Matte White F01G Gloss White <b>Premium Finishes</b> F02 Ivory F03 Stonewash F04 Camel F05 Gray Day F06 Pebble Beach F07 Steel F08 Gray Seal F09 Mocha F10 Bronzed F11 Black F12 Ultrasonic Clear</p>	<p>F13 Merlot F14 Red Skies F15 Lemon F16 Forest Hunter F17 Olive F18 Khaki F19 Heather Green F20 Blue Print F21 Reflex Blue F22 Navy FCC Custom Color</p>	<p><b>Voltage</b> 120 277 347</p>	<p><b>Lamp Type</b> T8 T5 T5HO</p>	<p><b>Options</b> SS-L/R (Left/Right) Lamp Row Switching (Common Neutral Utilized) NLCKT Separate Night Light Circuit EMCKT Separate Emergency Circuit EBPL Emergency Battery Pack (635-700 Lumens) EBPH Emergency Battery Pack (975-1325 Lumens)</p>	<p><b>Dim</b> Dimming FS Fused Ballasts GTD Generator Transfer Device</p>
---	--	--	---	--	---	---

To view Wood Grain, Marble and Granite Finishes on our Website see "Products"--"Specialty Finishes".



