

Catalog Number	Type
Project Name	

# Delgada(Indirect Only) Series™

# DRPI-01

8 3/8" x 2" Indirect  
(T8, T5 or T5HO Lamps)

Shown with 4 1/2" Extended End



Shown with Flat End

## S P E C I F I C A T I O N S

### Housing

One-piece .080" thick extruded aluminum. Standard lengths are 4' and 8'. Provisions may be made for continuous rows of any length.

### End Caps

- (FE) Flat End – .100" thick die-cast aluminum finished to match fixture housing and secured with no visible fasteners
- (XE) 4 1/2" Extended End – .100" thick die-cast aluminum finished to match fixture housing and secured with no visible fasteners

### Finish

Standard and premium finishes are baked powder coat electrostatically applied (2.0 mil minimum thickness) to assure aesthetics and durability.

### Reflectors

Die-formed from .020" thick high reflectance specular aluminum.

### Ballast

Standard ballasts for T5 and T5HO lamps are UL/CUL listed, Class P, HPF electronic, universal 120/277volt, programmed rapid start with <10% THD.

Standard ballasts for T8 lamps are UL/CUL listed, Class P, HPF electronic, universal 120/277volt, instant start with <10% THD.

### Circuitry

All fixtures are factory pre-wired for a single circuit. Provision for multiple switching/circuiting is optional.

### Wiring


All fixtures intended for continuous rows are provided with factory installed quick-connect wiring.

### Controls


Contact factory for control by Occupancy Sensors, Photo Controls and Daylight Harvesting.

### Certification


All fixtures are UL/CUL listed for use in "Dry Applications". "Damp Location" is optional.



DRPI-01  
T5 or T5HO



DRPI-01  
T8

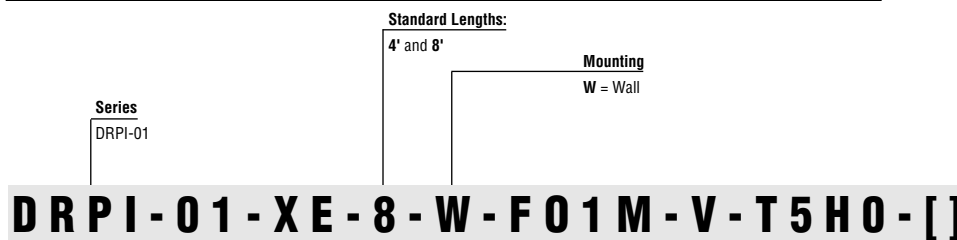

### End Caps

- FE Flat End
- XE 4 1/2" Extended End

### Standard Finishes

- F01M Matte White
- F01G Gloss White
- Premium Finishes**
- F02 Ivory
- F03 Stonewash
- F04 Camel
- F05 Gray Day
- F06 Pebble Beach
- F07 Steel
- F08 Gray Seal
- F09 Mocha
- F10 Bronzed
- F11 Black
- F12 Ultrasonic Clear
- F13 Merlot
- F14 Red Skies
- F15 Lemon
- F16 Forest Hunter
- F17 Olive
- F18 Khaki
- F19 Heather Green
- F20 Blue Print
- F21 Reflex Blue
- F22 Navy
- FCC Custom Color

### Voltage

- 120
- 277
- \*347
- \*Contact Factory

### Lamp Type

- T5
- T5HO
- T8

### Options

- NLCKT** Separate Night Light Circuit
- EMCKT** Separate Emergency Circuit
- EBPL** Emergency Battery Pack (635-700 Lumens)
- EBPH** Emergency Battery Pack (975-1325 Lumens)
- Dim** Dimming
- FS** Fused Ballasts
- GTD** Generator Transfer Device
- DC** for T5 or T5HO Lamps Clear Sheet Acrylic Dust Cover
- DC** for T8 Lamps Clear Extruded 100% DR Acrylic Dust Cover



To view Wood Grain, Marble and Granite Finishes on our Website see "Products" - "Specialty Finishes".

# DRPI-01

## Indirect - T5HO

### Solid Aluminum Bottom Panel


**Catalog Number:** DRPI-01-FE-4-W-F01M-120-T5HO

**Report Number:** LTL#13293.ies

**Luminaire Description:** Extruded Aluminum Housing  
with Specular Aluminum  
Reflector with Open Top

**Lamp:** One Philips F54T5/850/HO/ALTO  
Rated at 4400 Lumens

Total Luminaire Efficiency = 75.1%  
100% Up 0% Down

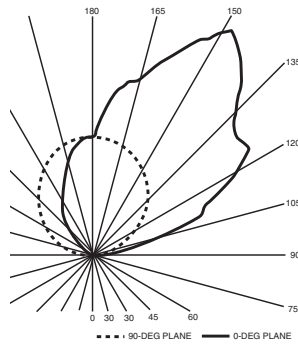

### RP-1 Compliant

#### CANDELA DISTRIBUTION

#### LUMENS

	0.0	22.5	45.0	67.5	90.0	112.5	135.0	157.5	180.0
90	0	0	0	0	0	0	0	0	0
95	61	55	66	113	32	6	0	1	0
105	490	563	559	490	147	39	15	26	17
115	904	957	951	765	282	140	72	37	39
125	1316	1217	1119	1036	418	270	184	137	130
135	1416	1455	1489	1052	534	404	300	249	243
145	1762	1756	1493	1036	640	545	415	368	365
155	1621	1500	1281	1073	727	683	570	499	490
165	1267	1235	1185	1001	785	776	729	676	669
175	1021	967	933	864	817	809	815	808	808
180	820	820	820	820	820	820	820	820	820

